

### DESCRIPTION

Thickness	EN ISO 24342	6.5mm
Wear Layer	EN ISO 24342	0.7mm
Weight	EN ISO 24342	10.5kg/m <sup>2</sup>
Tile Dimensions	ISO 24342	579mm x 579mm

### CLASSIFICATION

Classification	ISO 20582	34
Packaging	3 Tiles	1m <sup>2</sup> /Box
Fire Class	EN 13501.1	Bfl-s1
Anti-Static	BS EN 1815	Rubber Sole: -1.0kV PVC Sole: -1.7kV
Anti-slip (coefficient)	BS EN 13893	>.30
Anti-slip	BS EN 51130	R10


### PERFORMANCE

Abrasion	EN 660.2	T
Indentation	ISO 24342	<0.10mm
Acoustic	ISO 717.2	12 db
Caster Wheel	EN 425	No Damage
Dimensional Stability	ISO 23999	0.15%
Thermal Resistance	ISO 8302	+/- 0.013m <sup>2</sup> K/W
Chemical Resistance	BS EN 423	Good

### ENVIRONMENTAL ACCREDITATIONS

TVOC after 28 days	ISO 16000-6	<100µg/m <sup>3</sup>
Certification	-	Floorscore®

### TECHNICAL ACCREDITATIONS

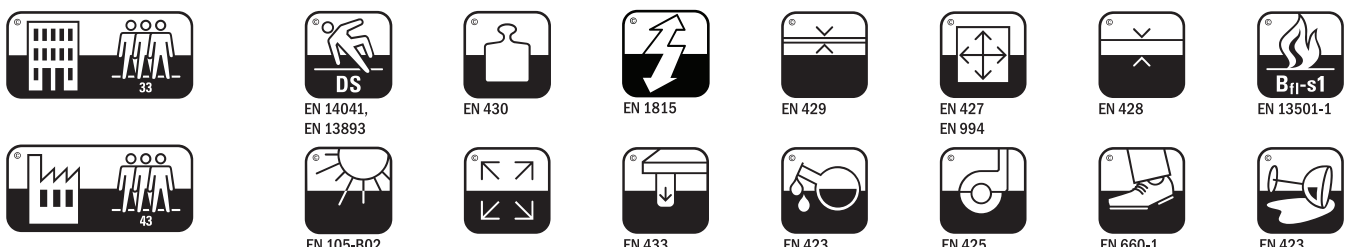

CE EN14041:2004

## Recyclable

BRE-Green Guide Ratings A+

