

DESCRIPTION

Total Thickness	EN ISO 24346 [EN 428]	7.8mm
Thickness of wearlayer	EN ISO 2434 [EN 429]	0.7mm + Polyurethane
Weight	EN ISO 23997 [EN430]	12.5kg/m ²
Tile Dimensions	EN ISO 24342 [EN 427]	457mm x 457mm 497mm x 497mm

CLASSIFICATION

Norm / Product specification	-	EN ISO 10582 [EN 6491]
European classification	EN ISO 10874 [EN 685]	34
Fire Class	EN 13 501-1	Bfl-s1
Static electrical propensity	EN 1815	<2 kV
Slip resistance	DIN 51130	R9


PERFORMANCE

Wear resistance	EN 660.2	<3mm ³
Wear group	NF 189	T
Dimensional stability	EN ISO 23999-1 [EN 434]	<0.20 No Curling
Residual indentation	EN ISO 24343-1 [EN 433]	<0.05
Castor chair test (type W)	ISO 4918 [EN 425]	No Change
Shore hardness	EN ISO 868	>92 HA
Thermal conductivity	EN ISO 10456 [EN12524]	0.25 w/(m.K)
Colour fastness	EN 20 105 - B02	>6 degree
Surface treatment	-	PUR+
Chemical products resistance	EN ISO 26987 [EN 423]	OK

ENVIRONMENTAL ACCREDITATIONS

TVOC after 28 days	ISO 16000-6	<100 µg/m ³
Certification	-	Floorscore®

TECHNICAL ACCREDITATIONS

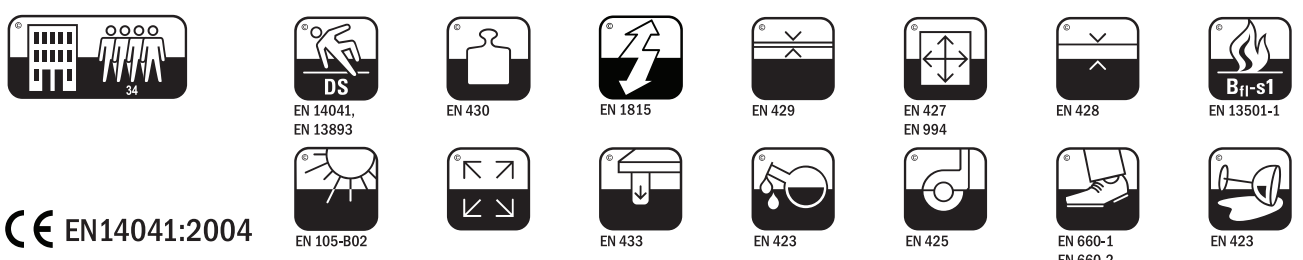

CE EN14041:2004

Recyclable

BRE-Green Guide Ratings A+

